


Clapet de non retour à battant

- Acier GP240GH+N
- Contacts Inox
- Pour eau, air, vapeur et tout autre fluide non agressif



Dimensions selon la Norme EN 558-1 série 1

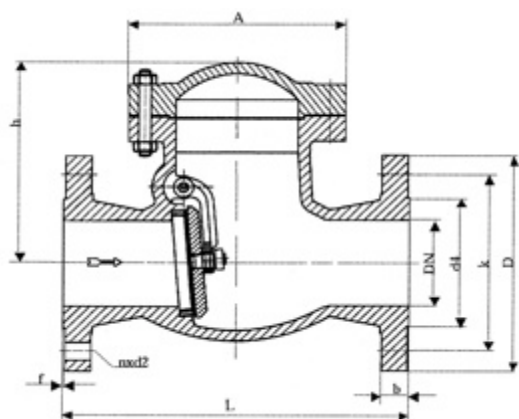

DN	L	D	K	d4	h	n	d ₂	b	f	Poids
										Weight
										Gewicht
										kg
40	200	150	110	88	145	4	18	18	3	13
50	230	165	125	102	160	4	18	20	3	17
65	290	185	145	122	175	8	18	22	3	24
80	310	200	160	138	190	8	18	24	3	32
100	350	235	190	162	220	8	22	24	3	47
125	400	270	220	188	240	8	26	26	3	62
150	480	300	250	218	260	8	26	28	3	88
200	600	375	320	285	350	12	30	34	3	170
250	730	450	385	345	370	12	33	38	3	216
300	850	515	450	410	440	16	33	42	4	327

Conditions de service / Working conditions / Betriebsdruck und Temperatur

Température (°C)	-10	0	120	200	300	400
Pression / Pressure / Druck (bar)	40	40	40	35	28	21

Matières / Materials / Material

- Corps** : Acier GP240GH+N
- Chapeau** : Acier GP240GH+N
- Battant** : Acier moulé GP240GH
- Axe** : Inox (X20 CR 13)
- Sièges** : Inox (X20 CR 13)
- Joint corps/chapeau** : Graphite